




Table


Hardware			
NO.	Diagram	Description	QTY.
a		Round head screw with washer	2
b		Large flat head screw with large plastic bushing	2
c		Small flat head screw with small plastic bushing	2

△ Important Note: When you open the plastic bag, please make sure that all of the components listed above are included. If anything is missing, please contact us

①


Assemble 1

1. Insert L-shaped frame into holes in base. L-shaped frame is side specific and cratered side faces out towards wheels. Use “a” screws at bottom, and tighten as pictured.

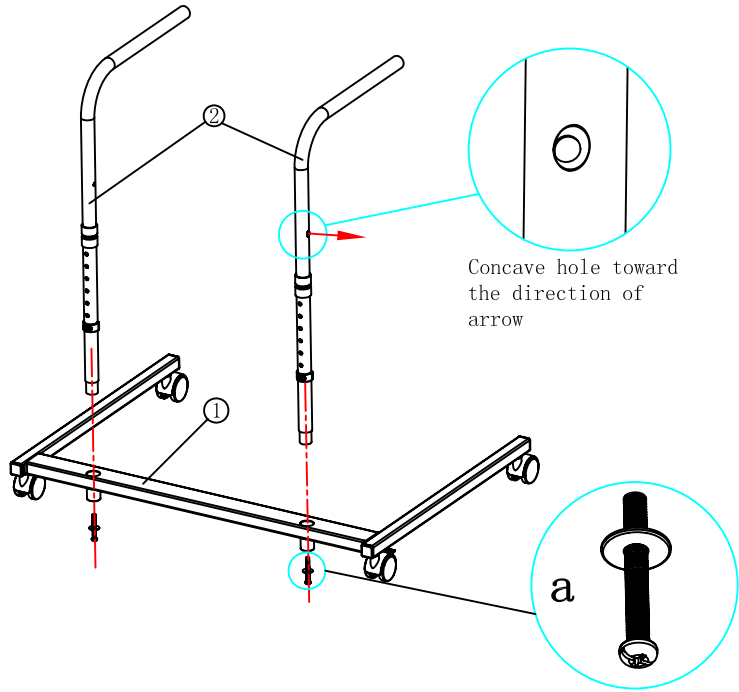

②


2. Place table top onto tubes and align holes of tubes. Use “b” screws and place large bushing between tubes with flat side of plastic bushing going into L-shaped frame. Tighten as pictured.

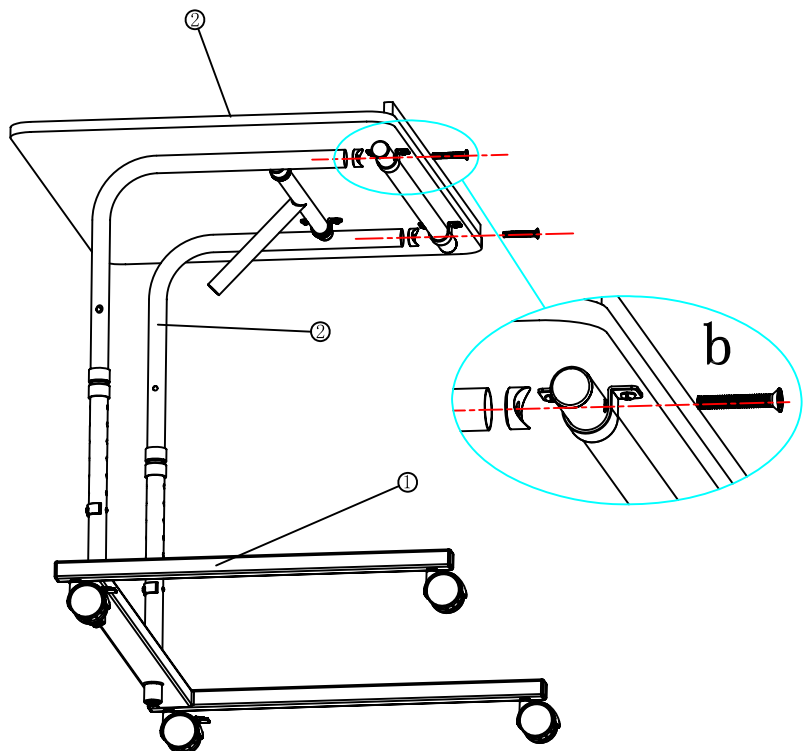

③

Assemble 3


3. Fit T-tube onto chrome tube attached to bottom of table top. Knob on T-tube needs to be loosened and kept loosened until table fully assembled. Use "c" screws and place small bushing between tubes with flat side of plastic bushing going into T-shaped frame. Tighten as pictured.

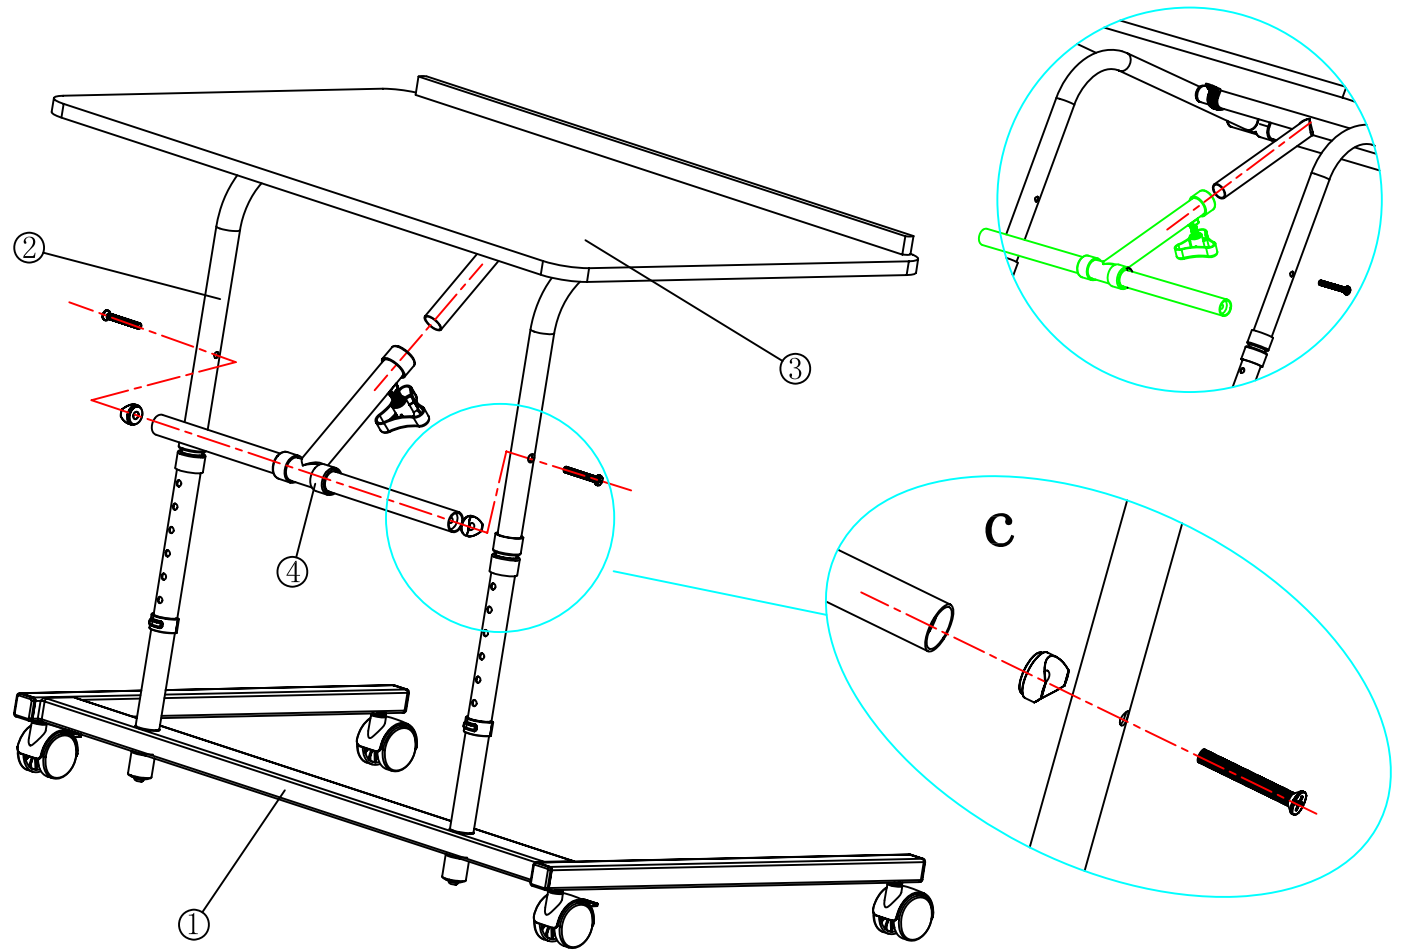

④

Tilt Adjustment

Loosen knob to adjust table top angle position. Lift table to desired angle. Tighten Knob to lock position.

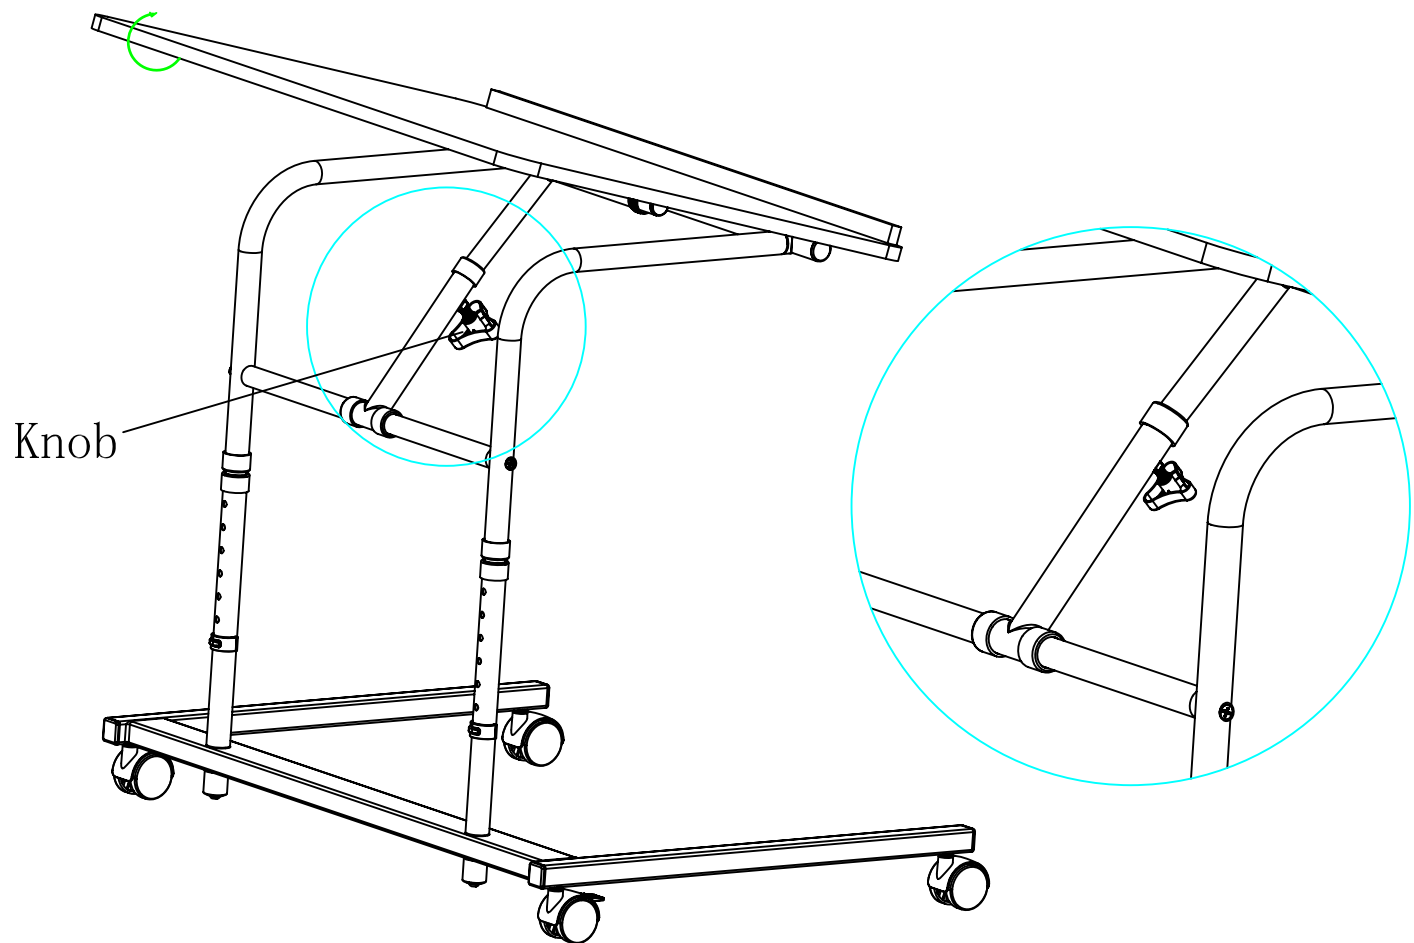

⑤

Height Adjustment

Remove C-clips to adjust table height. Lift table to desired height. Insert C-clips back into holes so that it passes through both the front and back of the tube in order to secure the table height.

